




**SPANNTOP mini deadlength size 32. Technical data**

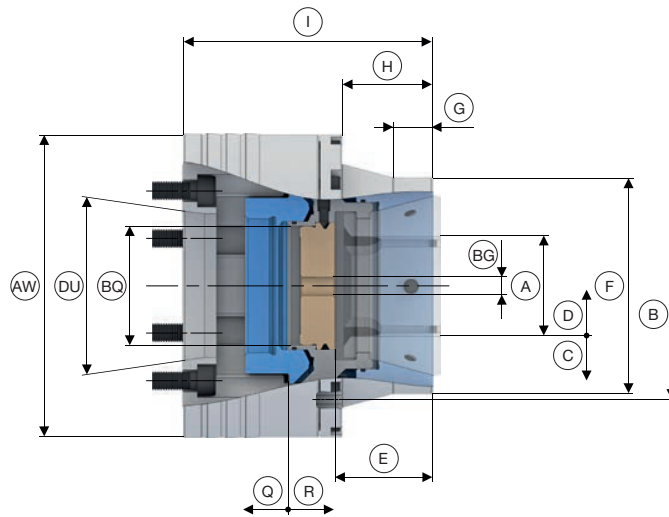

<b>Size</b>	<b>32</b>	
<b>Variant</b>	<b>Deadlength</b>	
Run-out ≤ [mm]	0,020	
Max. radial clamping force [kN]	70	
Max. axial compression force [kN]	25	
RPM n max. [1/min.]	8000	
Clamping range [mm]	3 – 32	
Release stroke in Ø [mm]	C	
Reserve stroke in Ø [mm]	D	
Range / recommended workpiece tolerance [mm]	± 0,3	
End-stop depth [mm]	E	
Ø Capacity [mm]	BQ	
End-stop thread size [M]	BG	
Location front end-stop	F	
Centering length [mm]	G	
Bolt hole circle end-stop	B	
Length [mm]	H	
Reserve stroke axial [mm]	Q	
Release stroke axial [mm]	R	


Spindle nose	DU	A2-4		A2-5		A2-6	
<b>Total length [mm]</b>	I	112	122	114	122	142	115
Outer Ø [mm]	AW	130				159	
Weight [kg]		7		6,5		8,3	
In stock		✓	✓	✓	✓	✓	
Order no.		10794/0009	10794/0010	10794/0011	10794/0012	10794/0013	10794/0067

Spindle nose	DU	AP140
<b>Total length [mm]</b>	I	101
Outer Ø [mm]	AW	149
Weight [kg]		7,2
In stock		✓
Order no.		10794/0068

Clamping heads	Accessory overview
Page 366	Page 396



**SPANNTOP mini deadlength size 42. Technical data**

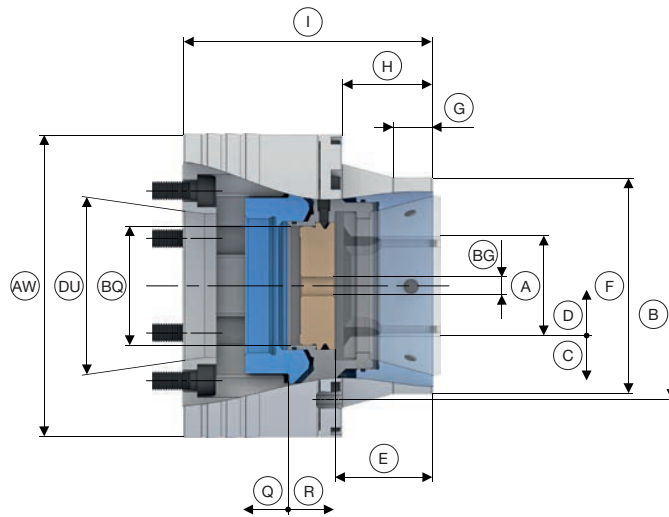

<b>Size</b>	<b>42</b>	
<b>Variant</b>	<b>Deadlength</b>	
Run-out ≤ [mm]	0,020	
Max. radial clamping force [kN]	80	
Max. axial compression force [kN]	35	
RPM n max. [1/min.]	7000	
Clamping range [mm]	A	3 – 42
Release stroke in Ø [mm]	C	0,6
Reserve stroke in Ø [mm]	D	1,0
Range / recommended workpiece tolerance [mm]	± 0,5	
End-stop depth [mm]	E	45,8
Ø Capacity [mm]	BQ	44
End-stop thread size [M]	BG	10
Location front end-stop	F	Ø 98 f7
Centering length [mm]	G	25
Bolt hole circle end-stop	B	LK Ø 113 [9 x M6]
Length [mm]	H	44
Reserve stroke axial [mm]	Q	2
Release stroke axial [mm]	R	2,5

Spindle nose	DU	A2-4		A2-5		A2-6	
<b>Total length [mm]</b>	I	125	118	125	142	124	142
Outer Ø [mm]	AW	139				159	
Weight [kg]		8,6		8,5		9,5	
In stock		✓	✓	✓	✓	✓	✓
Order no.		10794/0050	10794/0014	10794/0015	10794/0016	10794/0017	10794/0018


Spindle nose	DU	AP110	AP120	AP140	
<b>Total length [mm]</b>	I		105	117	
Outer Ø [mm]	AW		149		
Weight [kg]		8,4	8,1	9	
In stock		✓	✓	✓	✓
Order no.		10794/0051	10794/0066	10794/0019	10794/0020

➔

Clamping heads Page 366	Adaptations I.D. clamping Page 240	Accessory overview Page 396



**SPANNTOP mini deadlength size 52. Technical data**

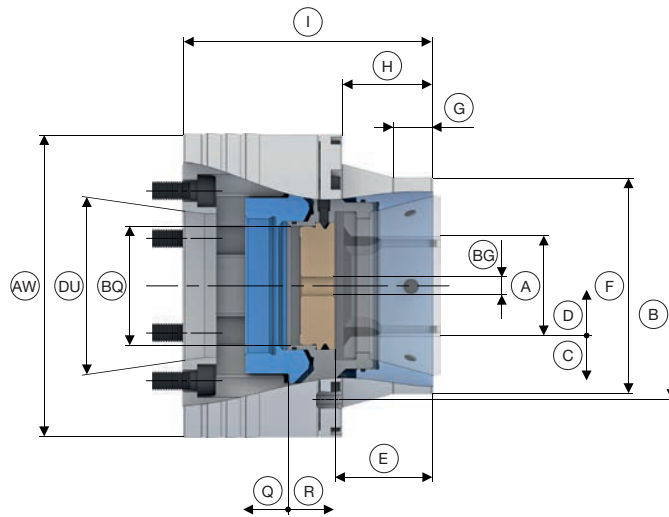

Size	<b>52</b>	
Variant	<b>Deadlength</b>	
Run-out ≤ [mm]	0,020	
Max. radial clamping force [kN]	94	
Max. axial compression force [kN]	40	
RPM n max. [1/min.]	7000	
Clamping range [mm]	A	3 – 52
Release stroke in Ø [mm]	C	0,6
Reserve stroke in Ø [mm]	D	1,0
Range / recommended workpiece tolerance [mm]	± 0,5	
End-stop depth [mm]	E	45,8
Ø Capacity [mm]	BQ	53
End-stop thread size [M]	BG	10
Location front end-stop	F	Ø 98 f7
Centering length [mm]	G	23
Bolt hole circle end-stop	B	LK Ø 125 [9 x M6]
Length [mm]	H	44
Reserve stroke axial [mm]	Q	2
Release stroke axial [mm]	R	2,5


Spindle nose	DU	A2-4	A2-5	A2-6	A2-8		
Total length [mm]	I	122		147	120		
Outer Ø [mm]	AW	149		163	202		
Weight [kg]		9,8	9,5	10	14		
In stock		✓	✓	✓	✓		
Order no.		10794/0021	10794/0022	10794/0023	10794/0024	10794/0025	10794/0049

Spindle nose	DU	AP110	AP120	AP140		
Total length [mm]	I	100	115	105	115	107
Outer Ø [mm]	AW	149		149	149	149
Weight [kg]		9	9,4	9	9	9
In stock		✓	✓	✓	✓	✓
Order no.		10794/0043	10794/0052	10794/0026	10794/0027	10794/0028





**SPANNTOP mini deadlength size 65. Technical data**

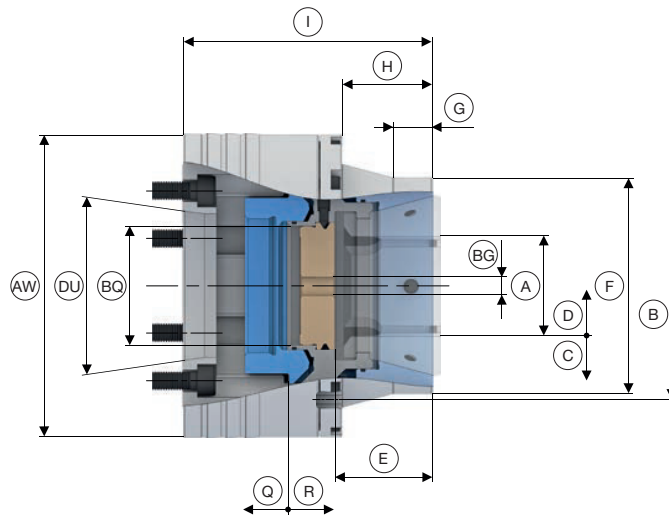

<b>Size</b>	<b>65</b>	
<b>Variant</b>	<b>Deadlength</b>	
Run-out ≤ [mm]	0,020	
Max. radial clamping force [kN]	105	
Max. axial compression force [kN]	45	
RPM n max. [1/min.]	6000	
Clamping range [mm]	A	3 – 65
Release stroke in Ø [mm]	C	0,6
Reserve stroke in Ø [mm]	D	1,0
Range / recommended workpiece tolerance [mm]	± 0,5	
End-stop depth [mm]	E	54
Ø Capacity [mm]	BQ	66
End-stop thread size [M]	BG	12
Location front end-stop	F	Ø 119 f7
Centering length [mm]	G	22
Bolt hole circle end-stop	B	LK Ø 145 [9 x M6]
Length [mm]	H	50
Reserve stroke axial [mm]	Q	2
Release stroke axial [mm]	R	2,5


Spindle nose	DU	A2-4	A2-5	A2-6			A2-8	
<b>Total length [mm]</b>	I	128	138	124	138	163	133	163
Outer Ø [mm]	AW	167					202	
Weight [kg]		13	13,5	12,5			16,5	
In stock		✓	✓	✓	✓	✓	✓	✓
Order no.		10794/0065	10794/0001	10794/0002	10794/0003	10794/0004	10794/0005	10794/0006

Spindle nose	DU	AP110	AP120	AP140	AP170		AP220
<b>Total length [mm]</b>	I	125	129	138	110	128	111
Outer Ø [mm]	AW	167			180		230
Weight [kg]		12,6		13,6	8,5	13,5	21,7
In stock		✓	✓	✓	✓	✓	✓
Order no.		10794/0048	10794/0063	10794/0008	10794/0053	10794/0029	10794/0064

Clamping heads Page 366	Adaptations I.D. clamping Page 240	Accessory overview Page 396



**SPANNTOP mini deadlength size 80. Technical data**

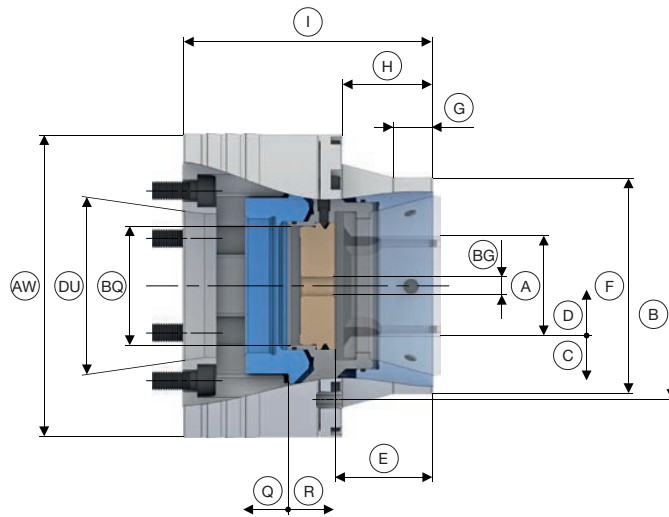

<b>Size</b>	<b>80</b>	
<b>Variant</b>	<b>Deadlength</b>	
Run-out ≤ [mm]	0,020	
Max. radial clamping force [kN]	115	
Max. axial compression force [kN]	50	
RPM n max. [1/min.]	5500	
Clamping range [mm]	A	4 – 80
Release stroke in Ø [mm]	C	0,6
Reserve stroke in Ø [mm]	D	1,0
Range / recommended workpiece tolerance [mm]	± 0,5	
End-stop depth [mm]	E	55
Ø Capacity [mm]	BQ	82
End-stop thread size [M]	BG	12
Location front end-stop	F	Ø 136 f7
Centering length [mm]	G	22
Bolt hole circle end-stop	B	LK Ø 160,5 [9 x M6]
Length [mm]	H	51
Reserve stroke axial [mm]	Q	2
Release stroke axial [mm]	R	2,5

Spindle nose	DU	A2-5	A2-6			A2-8		
<b>Total length [mm]</b>	I	<b>136</b>	<b>130</b>	<b>137</b>	<b>157</b>	<b>132</b>	<b>152</b>	<b>182</b>
Outer Ø [mm]	AW	180			205			
Weight [kg]		15,5	14,5			18,5		
In stock		✓	✓	✓	✓	✓	✓	✓
Order no.		10794/0044	10794/0030	10794/0031	10794/0032	10794/0033	10794/0034	10794/0035


Spindle nose	DU	AP140	AP170
<b>Total length [mm]</b>	I	<b>134</b>	<b>115</b>
Outer Ø [mm]	AW	180	
Weight [kg]		15	12
In stock		✓	✓
Order no.		10794/0036	10794/0045

➔

Clamping heads Page 366	Adaptations I.D. clamping Page 240	Accessory overview Page 396



**SPANNTOP mini deadlength size 100. Technical data**

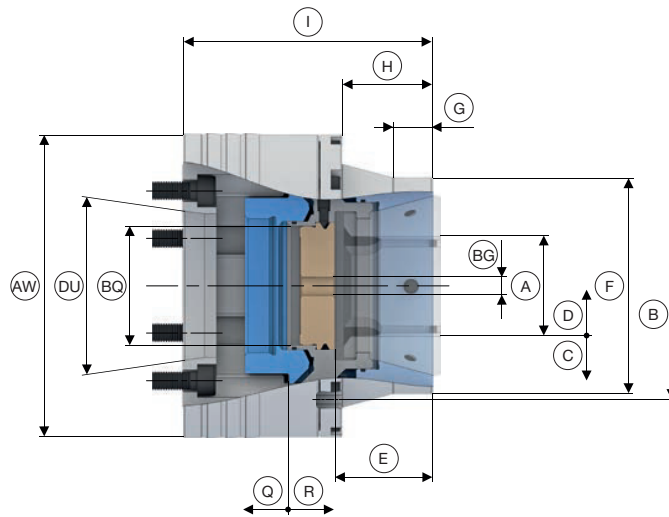

Size	<b>100</b>	
Variant	<b>Deadlength</b>	
Run-out ≤ [mm]	0,025	
Max. radial clamping force [kN]	150	
Max. axial compression force [kN]	65	
RPM n max. [1/min.]	5000	
Clamping range [mm]	A	15 – 100
Release stroke in Ø [mm]	C	2,0
Reserve stroke in Ø [mm]	D	1,5
Range / recommended workpiece tolerance [mm]	± 1,0	
End-stop depth [mm]	E	74
Ø Capacity [mm]	BQ	102
End-stop thread size [M]	BG	12
Location front end-stop	F	Ø 168 f7
Centering length [mm]	G	22
Bolt hole circle end-stop	B	LK Ø 208 [3 x M6]
Length [mm]	H	64
Reserve stroke axial [mm]	Q	3
Release stroke axial [mm]	R	5

Spindle nose	DU	A2-5	A2-6	A2-8	A2-11			
Total length [mm]	I	171	175	182	169	192	185	200
Outer Ø [mm]	AW	221						276
Weight [kg]		28,7	30,3	30	39			
In stock		✓	✓	✓	✓	✓	✓	
Order no.		10794/0058	10794/0037	10794/0038	10794/0039	10794/0040	10794/0059	10794/0060

Spindle nose	DU	AP140	AP170	AP220
Total length [mm]	I	171	175	162
Outer Ø [mm]	AW	221		230
Weight [kg]		29	30	28
In stock		✓	✓	✓
Order no.		10794/0061	10794/0041	10794/0042

